

# mont·bell

## 取扱説明書

# U.L.ボックスツェルト

### U.L. Box Zelt


この度はお買いあげいただき、誠にありがとうございます。この取扱説明書(以下「本説明書」といいます)は本製品の正しい取扱方法を説明しています。ご使用前に本説明書をよくお読みいただき、正しい使用方法をご確認ください。

なお、ご不明な点等ございましたら、販売店もしくは(株)モンベル カスタマー・サービスまでお問い合わせください。本説明書は大切に保管してください。

## ■ 特長

非常時の備えとして、常時携帯できる超軽量ツェルトです。くさび形状にすることで広々とした居住空間を実現。各縫製部分にシームテープを施し、高い防水性を確保しています。

## ■ 各部の名称

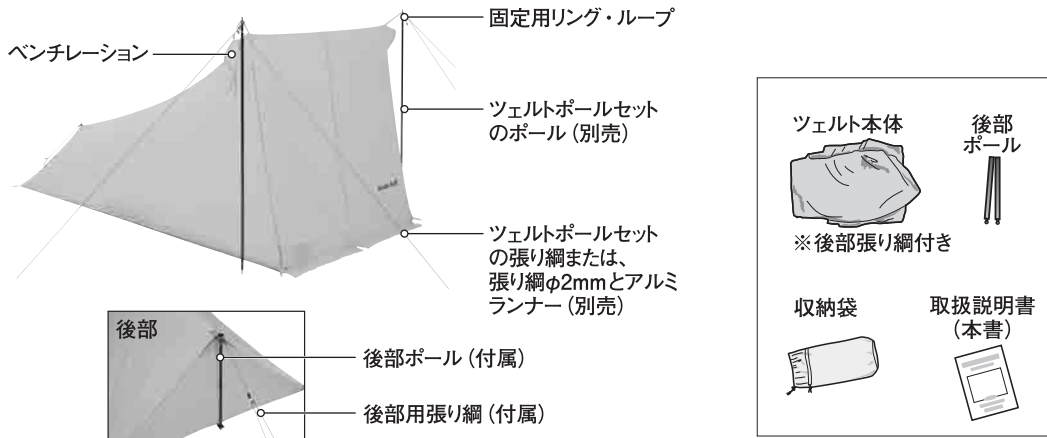

## ■ 安全上の注意

必ずお読みください

**危険** 人が死亡または重傷を負う危険が差し迫って生じることが想定される内容です。

- ツェルト内やツェルト近くでは、絶対に火気を使用しないでください。火災や酸素欠乏症、一酸化炭素中毒等の恐れがあります。
- 出入り口やベンチレーションを常に開け、換気に充分ご注意ください。


**警告** 場合により人が死亡または重傷を負う可能性が想定される内容です。軽傷または物的損害が発生する頻度が高いことが想定される内容です。

- 本製品を設営される際は、周囲の環境や気象条件などを充分考慮し、安全を確認してください。
- 出入口は風下側を選び設営してください。強風で本製品が飛ぶ恐れがあります。
- 本製品の改造や分解などは絶対にしないでください。性能が損なわれ、十分に保護能力が発揮できない恐れがあります。

- 使用前は毎回必ず点検をしてください。老朽化が認められる場合や損傷が認められたり、疑わしい場合は直ちに本製品の使用を中止してください。本来の性能が発揮できない恐れがあります。
- 正しいお手入れ方法、保管方法を守ってください。誤ったお手入れや保管方法を行うと、本来の性能を発揮できない恐れがあります。
- 本製品は、非常時の備えとして使用するテントのため、通常のテントと異なり完全な防水性はありません。

**注意** 人が傷害を負ったり物的損害の発生が想定される内容です。

- 本商品はあくまで緊急時の使用を想定して、軽量化を優先し超軽量素材を使用しております。ツェルトポールセットを取り付け可能な仕様にはしておりますが、常時テントとして使用いただく設計ではございません。破損の恐れがありますので、ご理解の上ご使用ください。
- 本体生地は熱に弱い性質を持った合成繊維です。たき火やストーブなどを近づけないようご注意ください。
- テントとして使用の際は必ずペグ(別売)で固定してください。砂地や雪上では状況に応じたペグ等が別途必要です。
- 本製品の設営地はできるだけ平坦地を選び、危険のない場所を選んでください。
- ナイロンは太陽光線の紫外線により劣化しますので、長期間張ったまま放置しますと著しく寿命が縮まります。また、硫黄ガスが発生する温泉地等でも寿命を縮めますのでご注意ください。
- 後部ポールを組み立てる際は、奥まで差し込んでください。奥まで差し込まないとポールが破損する恐れがあります。また、指を挟まないようにしてください。
- ショックコードを必要以上に伸ばさないでください。ポールが跳ね返った際、衝撃でポール先端が破損する恐れがあります(右図参照)。

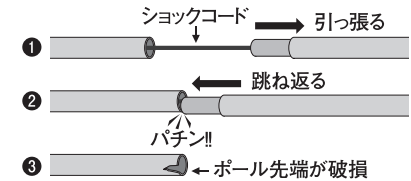

## ■ 使用前の点検

- 後部ポールに亀裂などの破損がないか
- 生地に破れがないか

**使用方法** ※使用方法によっては別売のポール、張り網(φ2mm)、アルミランナー、アルミVペグが必要です。



ツェルト内で傘などを広げる等して空間をつくり使用。ベンチレーターにロープ(別売)を通して使用。


## ○ 別売のポール・張り網を用いて以下のような方法でも使用可能です

※別途、アルミVペグ16mm(9本)及びツェルトポールセット(1セット)または張り網φ2mm(400cm×2本)、アルミランナーミニ(4個)、お持ちのトレッキングポール等が必要です。


- ① ツェルト本体の生地を設営地に広げ、四隅をペグ(別売)等で固定します。





- ② 後部ポールを組み立てます(図A)。(後部ポールは、中に通っているショックコード通りにポールをつなぎ合わせると自然に組み上がります。) ※ショックコードを必要以上に伸ばさないように注意してください。

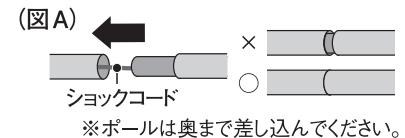


③後部ポールをポール受けに差し込みます。

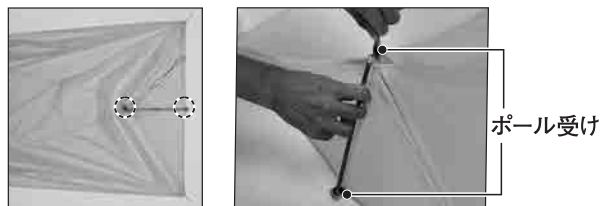


④別売の張り綱2本(ツェルトポールセットの張り綱)とアルミランナーを以下のイラストのようにセットします(図B)。張り綱3本をペグ(別売)で固定します(図C)。※ペグはこれ以上打ち込めない深さまで、打ち込んでください。

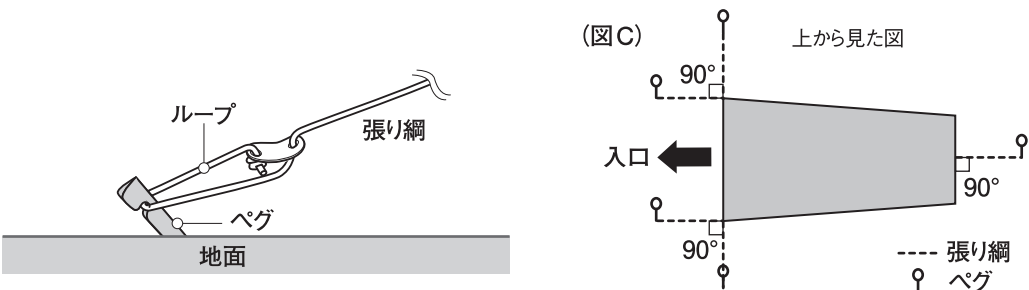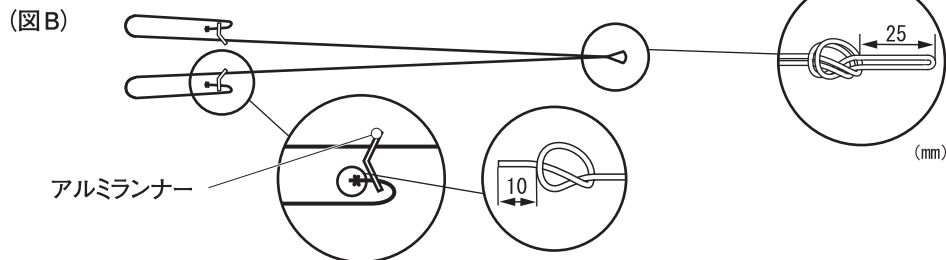

⑤ツェルトポール(別売)は先端にツェルト本体の固定用リング、張り綱ループの順に掛け、垂直になるように立てます。ツェルトポールの代わりに、お持ちのトレッキングポール(ストック)等を使用することもできます。

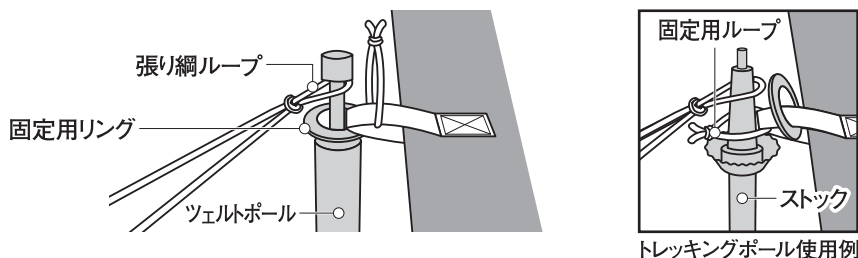


⑥ポールを垂直に立てたら、安定させるために、張り綱2カ所のランナーを調節します。

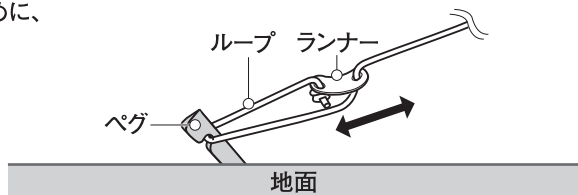

3

⑦続いて後部ポールを垂直に立てたら、ポールを安定させるために、後部ポール用張り綱のランナーを調節します。

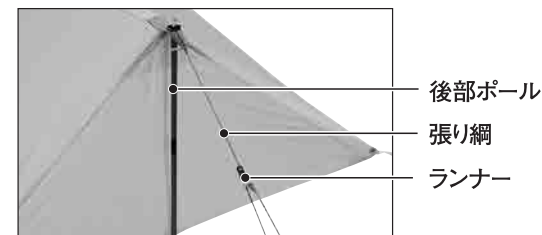

⑧収納は組み立てと逆の手順で行ってください。

## ■ お手入れ方法

間違ったお手入れ方法や保管方法は本製品の寿命を縮めます。使用後や保管時は以下の点を参考にしてください。

- 使用後は、泥汚れなどを水洗いし、陰干して乾燥後に収納してください。汚れたまま、あるいは濡れたまま長時間放置するとカビが発生する可能性があります、また生地も劣化しやすくなります。
- 長期の使用により、撥水性能(水を弾く力)が低下した場合は別売のS.R.スプレー等の撥水スプレーをご使用ください。
- ドライクリーニングや洗濯機による洗濯はしないでください。生地を傷める恐れがあります。
- ジッパーの動きが固くなりましたら、別売のスムースライダー™やローソクのロウを塗ると回復します。

## ■ 保管方法

- 本製品を長期間使用せずに保管する場合は、なるべくゆるくたたみ、風通しの良い場所に保管してください。付属の収納袋は、携行性を重視しているため、きつめにたたまないで入らないので使用を避けてください。

## ■ アフターサービス

お問い合わせいただきました本製品は万全を期して製造しておりますが、万一不備な点がございましたら、お問い合わせいただいた販売店、もしくは下記の弊社窓口までご連絡ください。

製造上の欠陥による不具合の場合は無償で交換させていただきます。なお、修理、交換等の要否につきましては、弊社の裁量にて判断させていただきます。


なお、以下のような原因での破損、不良につきましては保証いたしませんのでご了承ください。

- 本製品の誤った使用方法によるもの
- 間違ったお手入れ、保管方法、経年変化による素材劣化
- 乱暴な取り扱いによるもの
- その他、製造上の欠陥以外の原因によるもの

破損時は弊社にて診断をして、修理が可能な場合はご要望により有償にて修理させていただきます。

## ■ 仕様・サイズ

品番：1122731  
 品名：U.L.ボックスツェルト  
 素材：(本体)10デニールナイロンリップストップ

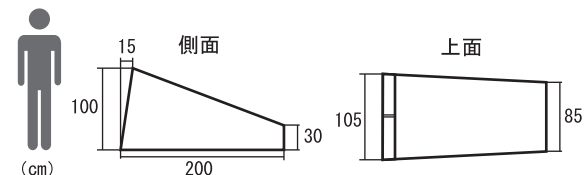

### 別売オプション

- ツェルトポールセット(1セット)
- アルミVペグ16mm(9本)
- 張り綱φ2mm(400cm×2本)
- アルミランナーミニ(4個)

## ■ その他

本製品の仕様、デザインは予告なく変更されることがあります。また、重量などのスペックには誤差が生じる場合があります。

4

# mont-bell

## User's Manual

# U.L. Box Zelt

### U.L. Box Zelt



Thank you for purchasing this product. Before using, please carefully read this manual for instructions on the proper care and usage of this product.

If you have any questions regarding this product, please contact Montbell Customer Service or the store of original purchase. Keep this manual for future reference.

## Description

An extremely lightweight shelter for carrying in case of an emergency. The wedge design allows for more space inside the shelter. Seams are sealed for improved water resistance.

## Components

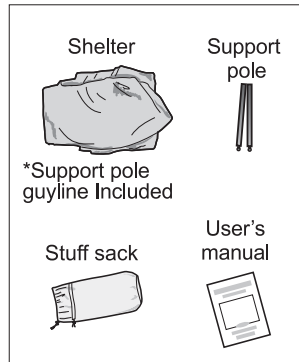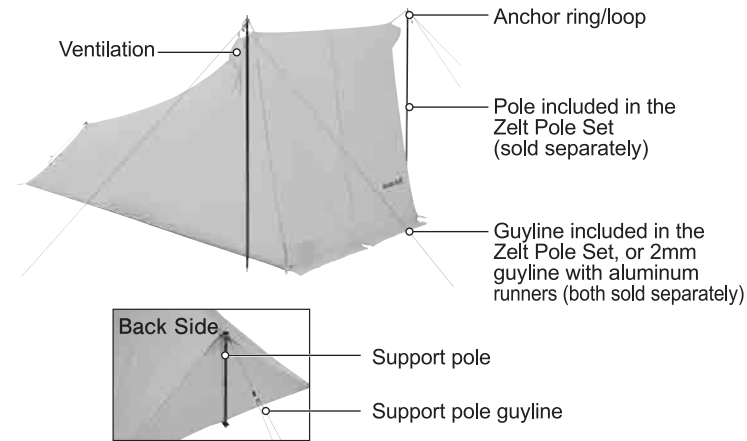

## Safety Warnings! Please read carefully.

**! DANGER!** Under certain conditions, use of this product can result in major injury or death.

- Never place a flame source in or near your shelter. Injury or death by fire, hypoxia and/or carbon monoxide poisoning is possible.
- Ventilate the shelter at all times by keeping ventilators or shelter door(s) open.


**! WARNINGS!** Under certain conditions, use of this product can result in injury, death, or property damage.

- When selecting a campsite, check the safety of the surrounding area and be aware of weather conditions.
- When selecting a campsite, place the entrance of the product downwind. Be aware this product can be blown away by strong winds.
- Do NOT modify or alter this product. Improper modifications and alterations can damage the product and impair functionality.

- Prior to use, check the product's condition and stop using immediately if you notice any deterioration from age/use, damage or irregularities.
- Please follow recommended care and storage instructions. Improper care and storage can lead to decrease in performance.
- This product is NOT a tent. It is a shelter for emergency situations. It is NOT waterproof.

**! CAUTION!** Under certain conditions, use of this product can result in injury or property damage.

- This product was designed for emergency situations, making it as lightweight as possible using extremely lightweight materials. Although it is possible to set up the shelter with poles (such as Montbell's Zelt Pole Set), it is NOT designed to be used as a tent, and may cause damage. Fully understand the limitations of the product before using.
- This shelter is made with synthetic fibers which are weak against heat. Keep this shelter away from flame sources.
- When using the shelter temporarily like a tent, be sure to anchor the shelter with pegs (sold separately). Depending on ground conditions, such as sand or snow, different pegs may be necessary.
- Choose a campsite free of danger and as level as possible.
- Ultraviolet rays from the sun can damage the shelter's fabric. Sulfur gas from natural hot springs can also shorten the shelter's lifespan.
- When assembling the Support pole, make sure all sections are fully inserted and be careful of pinching your fingers in between pole sections.
- Do NOT pull the shock cord more than necessary. Recoil can damage poles as seen in the figure to the right.

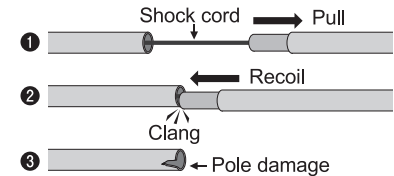


## Prior to use, inspect this product for:


- Cracks or damage to Support pole.
- Tears or damage to fabric and rainfly.

## Directions

\*Additional item are needed depending on how you use this product.



Sitting inside unsupported. Use an umbrella to lift shelter walls away and increase space.



Using a rope (sold separately) passed through ventilators.


- The following instructions describe how to set up the shelter with poles and guylines (sold separately).

\*Additional items needed: 9x 16mm Aluminum V pegs, 1x Zelt Pole Set (sold separately), or in place of the Zelt Pole Set; 2x trekking poles (or similar), 2x 400cm length guylines ( $\varnothing$ 2mm) and 4x aluminum runners.


- 1 Spread out the shelter and use pegs (sold separately) to stake out the four corners.





- 2 Assemble the support pole (see Fig. A). If you align the pole sections, the tension of the shock cord will help assembling the pole. Do NOT stretch the shock cord more than necessary.

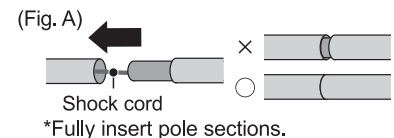


3 Insert the ends of the support pole into the grommets.

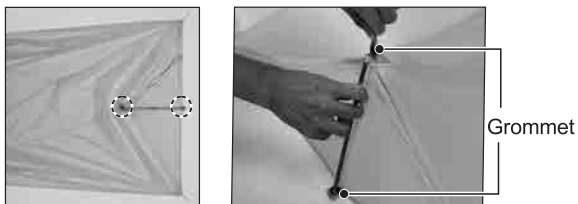


4 Make two sets of guylines with aluminum runners as shown below in Fig B. (or use the guylines included in the Zelt Pole Set). Stake down the three guylines as shown in Fig. C. \*Make sure to hammer pegs well into the ground.

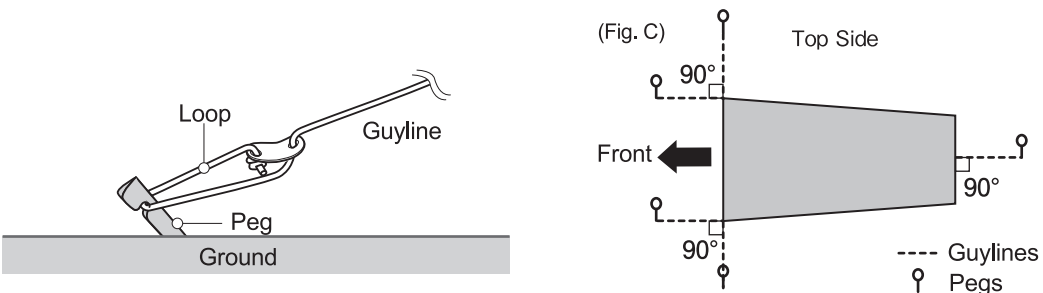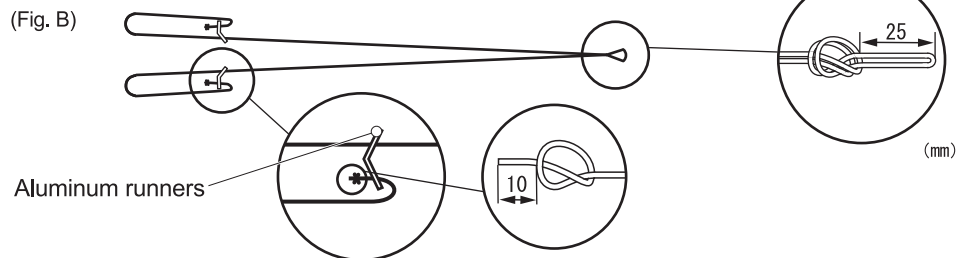

5 If using the Zelt Pole Set, fit the anchor ring over the end of the pole and then place the guyline loop on top. Then stand the pole up straight. If using trekking poles, use the anchor loop instead.

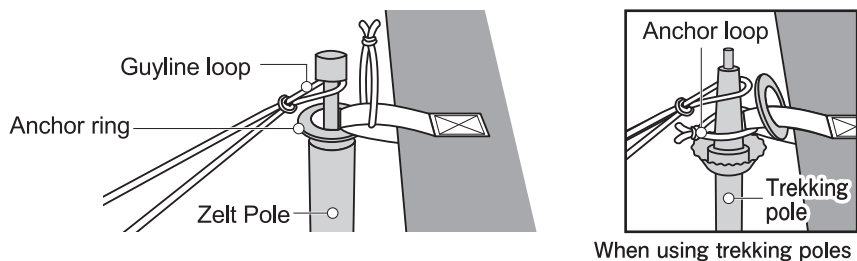


6 With the pole standing upright, adjust the tension of the guylines using the runners.

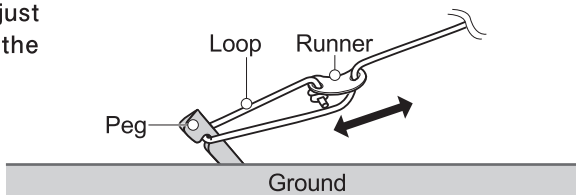

3

7 With the support pole standing upright, adjust the tension of the support pole guylines so the pole can stand up by itself.

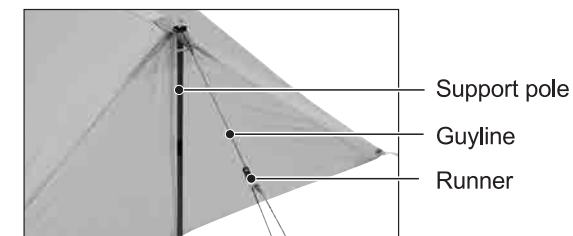

8 To break down the shelter, follow these directions in reverse.

## Care

Improper care and storage will shorten the lifespan of this product. Please review the following instructions for care and storage.

- Wash away stains and soiling with water. Avoid direct sunlight and allow to air dry in a cool well ventilated area. If stored wet or soiled, mold can grow and the fabric can start to prematurely deteriorate.
- Over time the tarp's water repellent treatment will deteriorate. To restore the tarp's water repellent abilities, reapply a water repellent spray (sold separately).
- Do NOT dry clean or wash in washing machine. This can damage the fabric.
- If zipper movement becomes stiff, use Smooth Slider (sold separately) or candle wax to restore functionality.

## Storage


- When storing for an extended period of time, store loosely in a well ventilated, cool, dry place out of direct sunlight. The product is not designed to be stored long term in the stuff sack which should only be used for transporting the product.

## Warranty

Montbell's warranty covers all defects in materials and workmanship to the original owner for the lifetime of the product. If a product ever fails due to a manufacturing defect, Montbell will repair the product, or replace it, at its discretion. This warranty does not cover damage(s) caused by accident, improper care, negligence, misuse, alterations or normal wear and tear. Damage(s) not covered under warranty will be repaired at a reasonable rate.

## Specifications

Style Number : 1122731  
 Product Name : U.L. Box Zelt  
 Material : 10-denier rip-stop nylon (Urethane coating)

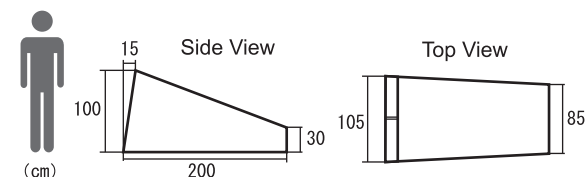

Accessories (sold separately)

- 1 × Zelt Pole Set
- 9 × Aluminum V Peg 16
- 2 × 400cm Guy Line φ2mm
- 4 × Aluminum Runner Mini

All product specifications and design are subject to change without prior notice. Actual product specifications may vary.

mont-bell Co.,Ltd.

2-2-2 Shinmachi, Nishi-ku, Osaka 550-0013 JAPAN  
 www.montbell.com

4